

DESCRIPTION

- Low Noise
NF= 3.0dB TYP. @ f= 500MHz
- High Power Gain
 G_{pe} = 15dB TYP. @ f= 500MHz
- High Gain Bandwidth Product
 f_T = 2.0GHz TYP.
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation



APPLICATIONS

- Designed for use in low noise amplifiers in the VHF~UHF band.

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	30	V
V_{CEO}	Collector-Emitter Voltage	14	V
V_{EBO}	Emitter-Base Voltage	3	V
I_c	Collector Current-Continuous	50	mA
P_c	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	0.25	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

TO-92 package

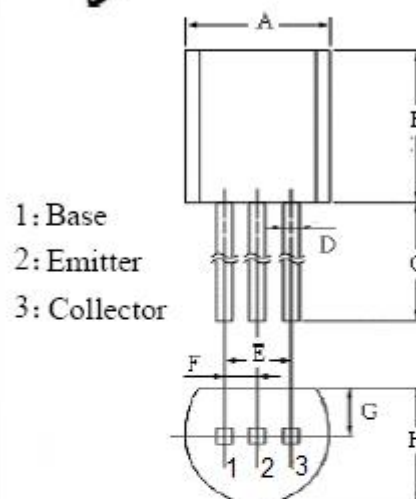

DIM	mm	
	MIN	MAX
A	4.33	4.83
B	4.33	4.83
C	14.0	15.0
D	0.36	0.56
E	2.54	
F	1.27	
G	0.92	1.12
H	3.40	3.60

ELECTRICAL CHARACTERISTICST_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
I _{CBO}	Collector Cutoff Current	V _{CB} = 15V; I _E = 0			0.1	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = 2V; I _C = 0			0.1	μ A
h _{FE}	DC Current Gain	I _C = 10mA ; V _{CE} = 10V	25		200	
f _T	Current-Gain—Bandwidth Product	I _C = 10mA ; V _{CE} = 10V	15	2.0		GHz
C _{OB}	Output Capacitance	I _E = 0 ; V _{CB} = 10V; f= 1.0MHz		0.75	1.1	pF
G _{pe}	Power Gain	V _{CE} = 10 V, I _C = 10mA; f= 500MHz	13	15		dB
NF	Noise Figure	V _{CE} = 10 V, I _C = 3mA; f= 500MHz; R _G = 50 Ω		3	4	dB

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.